

कार्यालय मुख्य चिकित्सा एवं स्वास्थ्य अधिकारी
जिला- मुंगेली (छ.ग.)


निविदा क्र./एन.एच.एम./एम.सी.एच/2019-20 192

मुंगेली दिनांक 10/10/2019

100 बिस्तर मातृ एवं शिशु चिकित्सालय (एम.सी.एच.) मुंगेली हेतु सामग्री/फर्नीचर/उपकरण

निविदा के शर्तें एवं नियम

1. कार्यालय मुख्य चिकित्सा एवं स्वास्थ्य अधिकारी, मुंगेली के अधिनस्थ 100 बिस्तर मातृ एवं शिशु चिकित्सालय (एम.सी.एच.) मुंगेली हेतु उपलब्ध कराई जाने वाली सामग्री/फर्नीचर/उपकरण की खरीदी हेतु निर्माता/अधिकृत विक्रेताओं/पंजीकृत फर्म से मुहरबंद निविदा आमंत्रित की जाती है।
2. सामग्री/फर्नीचर/उपकरण के लिए अधिकृत विक्रेताओं को निर्माता कंपनी का अथॉरिटी लेटर मूल रूप से मुख्य चिकित्सा एवं स्वास्थ्य अधिकारी, मुंगेली के नाम से निविदा के साथ संलग्न करना अनिवार्य है।
3. निविदा कार्यालय में दिनांक 14.11.2019 को दोपहर 03:00 बजे तक पंजीकृत डाक अथवा स्पीड पोस्ट से पहुँच जानी चाहिए। प्राप्त निविदा दिनांक 14.11.2019 को सायं 04:00 बजे अधोहस्ताक्षरकर्ता के कार्यालय में खोली जाएगी। निविदादाता के प्रतिनिधि उपस्थित रह सकते हैं। निर्धारित तिथी एवं समय के पश्चात प्राप्त निविदाओं पर विचार नहीं किया जावेगा। विलंब के लिए यह कार्यालय जवाबदार नहीं रहेगा। निविदा को अलग-अलग सील बंद लिफाफे में प्रस्तुत किया जावे। प्रथम लिफाफा समस्त निविदा सहपत्रों एवं द्वितीय लिफाफा प्राइज बिड का होना चाहिए। एक ही लिफाफे में प्रस्तुत निविदा निरस्त कर दी जाएगी। सहपत्रों का चेक लिस्ट भी प्रस्तुत करें। प्रथम लिफाफा क्रय समिति द्वारा पारित किये जाने के उपरान्त ही द्वितीय लिफाफा प्राइज बीड खोला जावेगा।
4. निविदा प्रारूप एवं निविदा की शर्तें तथा सामग्री/फर्नीचर/उपकरण की सूची निविदा प्रारूप के साथ निविदा फर्म कार्यालय मुख्य चिकित्सा एवं स्वास्थ्य अधिकारी, जिला चिकित्सालय के पास, रामगढ़, जिला मुंगेली (छ.ग.) से दिनांक 14.10.2019 से 13.11.2019 तक सायं 05:00 बजे तक शासकीय कार्य दिवस में निविदा फार्म रु. 3,000/- (रु. तीन हजार मात्र) के डिमांड ड्राफ्ट, राष्ट्रीयकृत बैंक का District Health Society - Non NRHM - Other Fund a/c 32266834946 के नाम से बना हों एवं Drawee बैंक मुंगेली शाखा होना अनिवार्य हैं, देने पर प्राप्त किया जा सकता है। उक्त राशि किसी भी दशा में वापसी योग्य नहीं है।
5. निविदा के साथ सामग्री/फर्नीचर/उपकरण के लिए धरोहर राशि रु. 2,70,000/- (रु. दो लाख सत्तर हजार मात्र) का बैंक ड्राफ्ट, राष्ट्रीयकृत बैंक का District Health Society - Non NRHM - Other Fund a/c 32266834946 के नाम से बना हों एवं Drawee बैंक मुंगेली शाखा का हों। सुरक्षा निधि सफल निविदाकार की रोककर शेष को राशि वापस लौटा दी जावेगी। सफल निविदादाता की अमानत राशि निविदा अवधि 01 वर्ष तक जमा रखा जावेगा जिस पर किसी भी प्रकार का ब्याज देय नहीं होगा।
6. निविदा खुलने के समय निविदा फर्मों के प्रतिनिधि उपस्थित रहते हैं तो इसके लिए निविदाकर्ता फर्म का अथॉरिटी लेटर होना आवश्यक है।

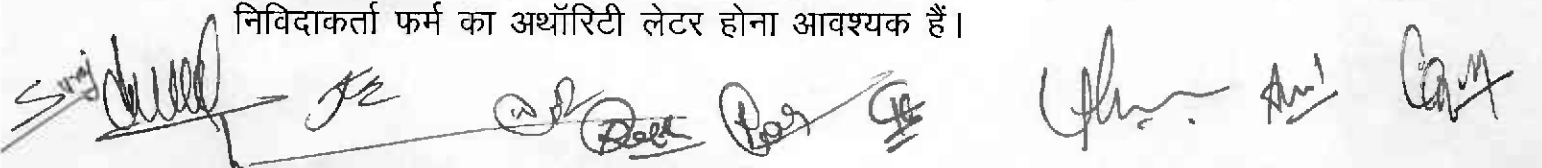

7. सामग्री/फर्नीचर/उपकरण के लिए निर्माता कंपनी का WHOGMP/आई.एस.ओ/आई.एस.आई. एवं अन्य गुणवत्ता धारक प्रमाण पत्र संलग्न किया जाना आवश्यक है।
8. पिछले वित्तीय वर्षों 2016-17, 2017-18 तथा 2018-19 का वाणिज्य कर अदा किया है एवं उस पर कोई कर बकाया नहीं है इस आशय का वाणिज्य कर समाशोधन प्रमाण-पत्र निर्धारित प्रारूप में प्रस्तुत करना होगा। आयकर रिटर्न वर्ष 2016-17, 2017-18 तथा 2018-19 की छाया प्रति संलग्न करना अनिवार्य है।
9. सामग्री/फर्नीचर/उपकरण इत्यादि की दर 100 बिस्तरीय मातृ एवं शिशु चिकित्सालय (एम.सी.एच.) मुंगेली में प्रदाय करने की होगी। ट्रांसपोर्ट व्यय (फ्रेड पेड) निविदाकर्ता द्वारा भुगतान किया जाएगा। इन्सटालेशन, ट्रांसपोर्ट व्यय, लोडिंग-अनलोडिंग, एफ.ओ.आर. डेस्टीनेशन के लिए शामिल होगा।
10. सामग्री/फर्नीचर/उपकरण का दर कैटलॉग के साथ दिया जाना होगा। न्यूनतम दर पाये जाने के उपरांत नमूना कय समिति के अवलोकन हेतु मंगाया जा सकता है।
11. क्रयकर्ता अधिकारी द्वारा सभी वस्तुएं निरीक्षण की शर्तों पर स्वीकार की जावेंगी। सामग्री/फर्नीचर/उपकरण का चयन क्रय समिति के तकनीकी विशेषज्ञों द्वारा गुणवत्ता का परीक्षण कर किया जावेगा। तकनीकी विशेषज्ञों के परिक्षण में गुणवत्ता युक्त सामग्री/फर्नीचर/उपकरण न होने की स्थिति में क्रय शून्य किया जा सकेगा।
12. निविदादाता को अपने फर्म का पेन, टीन नम्बर/जी.एस.टी. की छायाप्रति संलग्न करना अनिवार्य है।
13. निविदा में मंगाई गई सामग्री/फर्नीचर/उपकरण में पोस्ट डीलिवरी इन्सपेक्शन रिपोर्ट अनिवार्य है। सामग्री/फर्नीचर/उपकरण की गारंटी/वारंटी अवधि का स्पष्ट उल्लेख किया जावे। इस हेतु गारंटी/वारंटी सर्टिफिकेट भी प्रदाय किया जाना आवश्यक है। सामग्री/फर्नीचर/उपकरण का इन्स्टालेशन कंपनी/डीलर के ऑथराइज इंजीनियर द्वारा किया जावेगा। इन्स्टालेशन उपरांत रिपोर्ट प्रदाय किया जाना अनिवार्य होगा।
14. निविदा दर में सभी प्रकार के कर जैसे- (वैट टैक्स/केन्द्रीय कर/जी.एस.टी.) इत्यादि का उल्लेख पृथक से किया जाना अनिवार्य है। न्यूनतम दर का चयन सामग्री के कुल राशि (मूल्य+व्यय+कर) पर किया जावेगा। सफल निविदाकर्ता को सामग्री आपूर्ति के पश्चात् बिल में सामग्री राशि अलग से तथा देय कर की राशि अलग-अलग स्पष्ट रूप से उल्लेख करते हुए प्रस्तुत करना होगा जिससे की देय कर की राशि वाणिज्य कर विभाग के लेखा शीर्ष में जमा किया जावेगा तथा संबंधित फर्म द्वारा चालान मांग किए जाने पर चालान की प्रति उपलब्ध कराई जावेगी। भुगतान हेतु निविदा कर्ता फर्म का ही देयक मान्य किया जावेगा।
15. न्यूनतम दर संलग्न सूची अनुक्रम मे ही पूर्तिकर एवं हस्ताक्षरकर लेटर पेड मे देना होगा। इस कार्यालय द्वारा प्रदाय किये गये सूची के क्रम अनुसार ही दर अंकित किया जावे अन्यथा निविदा अमान्य कर दी जावेगी।
16. निविदा दर कम्प्युटर द्वारा मुद्रित होना चाहिए।
17. निविदादाता द्वारा नियम व शर्तों का उल्लंघन करने पर संबंधित फर्म का निविदा निरस्त कर दिया जावेगा।

18. निविदा में सामग्री/उपकरण की दर राज्य या केन्द्र शासन के द्वारा निर्धारित दर एवं अधिकतम खुदरा मूल्यों से अधिक नहीं होना चाहिए।
19. निविदा दर में सामग्री/फर्नीचर/उपकरण के मेक, माडल, कंपनी का उल्लेख किया जाना अनिवार्य होगा।
20. निविदा दाता द्वारा फर्म/कंपनी का विगत 03 वित्तीय वर्ष का टर्नओवर प्रमाण पत्र चार्टर्ड अकाउंटेंट द्वारा सर्टिफाइड कर प्रदाय करना होगा। फर्म/कंपनी का वित्तीय वर्ष 2016-17, 2017-18 तथा 2018-19 में प्रति वर्ष न्यूनतम टर्नओवर 2 करोड़ (रु. दो करोड़ मात्र) होना अनिवार्य हैं।
21. सामग्री/फर्नीचर/उपकरण की प्रदायगी आदेश प्राप्त होने के 30 दिन के अंदर प्रदाय करना होगा। विशेष कठिनाईयों में संबंधित अधिकारी को सूचना देने पर अवधि बढ़ाई जा सकती हैं परंतु किसी भी परिस्थिति में यह अवधि पांच सप्ताह से अधिक की नहीं होगी।
22. आदेशित सामग्री/फर्नीचर/उपकरण निर्धारित अवधि के अंदर आपूर्ति नहीं की जाती हैं तो 2 प्रतिशत पेनाल्टी चार्ज की जावेगी।
23. व्यवस्थित पैकिंग तथा पहुँच तक की संपूर्ण जवाबदारी प्रदायकर्ता की होगी। टूट-फूट तथा ट्रांसपोर्ट के दौरान कमी आने की संपूर्ण जवाबदारी प्रदायकर्ता की होगी। विलंब से रसीद प्राप्त होने पर लगने वाले डेमरेज चार्ज/विलंब शुल्क प्रदायकर्ता के बिल से वसूल की जावेगी।
24. दर भारतीय मुद्रा में ही स्वीकार की जावेगी। विदेशी मुद्रा की दर निरस्त कर दी जावेगी।
25. किसी भी निविदा को स्वीकार करना अथवा बिना किसी कारण सूचना के निरस्त करने का संपूर्ण अधिकार गठित क्रय/चयन समिति के पास सुरक्षित रहेगा।
26. सामग्री/फर्नीचर/उपकरण का एक ही दर अंकित किया जावें। प्रदाय टेडर फार्म से अलग सामग्री/फर्नीचर/उपकरण का नाम जोड़ने पर निविदा दर स्वीकार नहीं किया जावेगा।
27. खुली निविदा में प्राप्त सामग्री/फर्नीचर/उपकरण के एकल दर को भी जिला क्रय समिति द्वारा मान्य किया जा सकता हैं।
28. निविदा की अवधि 31 मार्च 2020 अथवा एक वर्ष (जो भी अधिक हो) तक के लिये मान्य होगी, जिसे आगामी अवधि हेतु भी बढ़ाया जा सकेगा, अवधि बढ़ाये जाने पर दरों में केवल कर में होने वाले बदलाव को ही मान्य किया जावेगा।
29. निविदा से संबंधित किसी भी प्रकार की विवाद की स्थिति में न्यायालयीन क्षेत्र जिला मुंगेली होगा।

संलग्न : सामग्री/फर्नीचर/उपकरण की सूची।

मुख्य चिकित्सा एवं स्वास्थ्य अधिकारी
जिला-मुंगेली छ.ग.)

OFFICE OF THE CHIEF MEDICAL AND HEALTH OFFICER, DIST-MUNGELI (C.G)
Furniture & Hospital Accssories for for 100 Bed MCH Wings

S.No.	Name of The Equipment	Size /Specification
1	Doctor's chair for OP Ward, Lab etc	Chair Ambulatory Is made of Aluminium Round Tube The seat and back are foam padded it comes with padded arm rests Aluminum frame structure, white painted frame chair These Chairs are Stackable. The Load Capacity is 120 kg This chair is Pre Treated Epoxy Powder Coated in white colour
2	Doctor's Table	The size of the doctors table should be 1370mm Width X 680mm Depth X 750mm Height with two storage units of 3 drawer unit and 1 unit of two drawers. It should be made from square tubular infrastructure with a large top surface. The product should have standard warranty with registered trademark
3	Duty Table for Nurses	Ambulatory table comes with 3 drawers which fits in hospital outpatient department Ambulatory Table is manufactured with no Sharp corners and is steel painted with epoxy powder coating. This table is robust construction, impact-resistant, scratch-resistant. It is easy to clean, washable and disinfectable. The overall dimension is 150 x 60 x 80 cm (L X W X H)
4	Table for Sterilisation use (medium)	
5	Long Benches (6 1/2" X 1 1/2")	Stainless steel long bench seat
6	Stool Wooden	
7	Stools Revoloving	Frame Is made of Round Tube The body section is mounted on 5 legs fitted with 5cms castors The height of the stool is adjustable with Pneumatic Gas Spring The Stool has Cushioned Seat Top
8	Steel Cup-board	
9	Wooden Cup Board	
10	Racks Steel	90L x 37.5W x 195H Frame work made of Mild Steel Angle and Plate which are Pre Treated & Epoxy Powder Coated Open Rack is also known as Slotted Angle Rack It is used for Storage Purpose in Hospitals It comprises of Six Shelves
11	Patients Waiting Chairs Fixed Steel	3 seater, Steel Size: 1900x630x900mm colour-blue Resistance against water Flat edges Highly very spacious (Airport three seater chair) colour -blue
12	Attendants Cots	Size is 1800mm in length x 600mm in width x 475mm in height with mattress Pretreated and epoxy coated material of construction Aluminium Composite Panel (ACP) sheet top Mounted on rubber shoes
13	Office Chairs	Colour: Black Seat Size: 21" W X 19" D Back Size: 19" W X 23" H Overall Dimensions: 24" W X 19" D X 34" - 36" H Material: Fabric Pneumatic Seat Height Adjustment. Medium Height Back Rest. Lumbar Adjustment on Back Small Cushion Pillow Support on Back Nylon Netted Mesh Back Adjustable Up-Down Arm Rest. Virgin Quality PP Stand/Base Gas lift Height Adjustment. 90 Degree Tilt Lock. Syncro Push Back Design Mechanism. Imported Castor Wheels with Good Grip. 360 Degree Revoloving.
14	Office Table	Table Top made of 25mm thick particle board with melamine finish All other parts made of 18 mm thick particle board with PU finish Two tone colour combination as in Image Lock on top drawer Holes for wire management on the top Product Dimensions & Weight Dimensions: mm (Inch) 1500 (59) W x 750 (29.5) D x 750 (29.5) H PRODUCT DETAILS COLOR - Cherry/Black brand Nilkamal
15	Foot Stools	Frame made of Round Tube The body section is mounted on Rubber Shoes Foot Step is Double Step The top is fixed with Laminated non skid board Product Size: 45L x 45W x 45H cms
16	Filing Cabinets (For Records)	Filing cabinet is made of MS Sheet It has 4 Drawers It is fitted with Lock Key
17	M.R.D. Requirements (Record Room Use)	
18	Paediatric Cots with railings	
19	Cradle	Frame Made of CRCA steel tube Cradle made of wire On PVC shoes Dimension: 900 L x 375 W x 975 H mm approx Pre-treated and Epoxy Powder Coated
20	Fowler's Cot	Specification: Overall size: 2100mm (L)*1050mm (W)*Ht Adj. 590mm to 750mm (H) Features: CRCA tubular frame work Four section perforated CRCA sheet top Height adjustment, Backrest, Kneerest, Trendlenburg & reverse trendlenburg operated by screw and lever mechanism with attached S.S folding handles Stainless steel bows with coloured metal panel New design collapsible railings S. Telescopic saline rod with four locations Four heavy duty swivel castors of 125mm Dia. (two with break) Pretreated and epoxy powder coated
21	Ortho Fracture Table	

S.No.	Name of The Equipment	Size /Specification
22	Hospital Coats (ISI Model)	erni Fowler BedTwo section top.Removable high quality ABS head and foot penal.Backrest adjustable by smooth crank mechanism.Overall size : 2140 x 940 x 530mmBed mounted on protective stumps.Collapsible safety stainless steel railing.Provision for I.V. Rod on all for location.Pretreated and Epoxy Coated Finish.
23	Hospital Cots Paediatric (ISI Model)	Complete with full-length dropline safety railings.Head and leg bows of equal height.Mounted on four 10cms. dia. castors (2 with brakes).Pre-treated and powder coated.Size : 137 x 76 x 60cm.
24	Wooden Blocks (Set)	
25	Back rest	Frame Is made of Round TubeBack support is made of CanvasThe Recline Angle is adjustable upto 4 positions with RatchetThe Back rest Is foldableProduct Size : 50L x 40H cms
26	Dressing Trolley (SS)	Frame Work of Dressing trolley is made of Round tubeIt has stainless steel shelves with railing The body section is mounted on 7.5 cm castorsThe Dressing Trolley has push handle on one sideIt comes with stainless steel bowl size 32cm and Bottle RackThe Dressing Trolley is fitted with Drawer & Dust BinProduct Size:- 90 x 60 x 80cm
27	Medicine Almira	Instrument Cabinet Is made of MS SheetIt has 4 Glass ShelvesThe cabinet has 2 partitionsThe top partition has 2 Glass Door with Mild Steel frame The bottom partition has 2 doors made of Mild SteelIt is fitted with Lock Key and Handle
28	Bin Racks (Wooden or Steel)	
29	ICCu Cots	Electric ICU Bed- Four section perforated two way longitudinal tilt hi-low facilityS function electrically operated backrest, knee rest, hi-low, Trendlenburgand reverse Trendlenburg with battery backupOverall Size: 2140 x 940 x 500/760mmRemovable high quality ABS head and foot panel with roller bumpersCollapsible safety stainless steel side railings125mm Central locking castors two with brakesProvision for IV Rod on all four locationPre-treated and Epoxy coated
30	Bed Side Screen (SS-Godrej Model)	Frame Work of Bedside Screen is made round tubesIt has 4 frames of equal sizeIt is mounted on 6 castors of dia 5cmIt comes with curtains and spring wireProduct Size: 240L x 165H cmKnock Down Construction to save freight
31	Medicine Trolley (SS)	Medicine Trolley Cassette type Is made of ABS Plastic with arc handleIt has Double sides trays ,within 50 units medication cassette bins It comes with one side plate cassetteMedicine Trolley Is easy to dischargeIt comes with noiseless castors , two with brakes and has centralized lockingMulti-bin container is available at rear side for storageIt has ergonomics designed push-handle for smooth movementMedicine trolley is equipped with total lock key systemProduct Size :78L x 49D x 92H cms
32	Case Sheet Holders With Clips (SS)	Case Sheet Holder Is made of Aluminium It is used to maintain the records of the patient
33	Bed Side Lockers (SS)	made of ABS PlasticIt comes with one towel railThe body section Is mounted on 5cm castorsIt comes with one drawer for storageProduct Size : 45L x 45W x 75H cms
34	Examination Couch (SS)	Frame made of CRCA steel Cushioned Two section top Head section adjustable on Pneumatic pump Measuring 450 mm L x 510 mm W approx Body section admeasure 1380 L x 51 W mm approx Three drawers underneath the top section Three storage units under the draws Pull-out foot-step Foldable/adjustable B.P. Apparatus tray Dimension: 1870 L x 510 W x 810 H mm approx Pre-treated and Epoxy Powder Coated
35	Instrument Trolley (SS)	Trolley is made of Mild Steel SheetIt has one drawer & 4 shelvesIt comes with oxygen cylinder cage & adjustable I.V. RodThe Monitor Trolley Is mounted on 12.5cm castorsIt has a switch & socket panel for medical equipmentProduct Size :80L x 60D x 140H cms
36	Instrument Trolley Mayos (SS)	Frame Work of Instrument trolley is made of heavy angleThe body section Is mounted on 7.5 cms castors.It comes with Three Stainless Steel Shelves with upstands on four sidesIt comes with Push Handle on one sideKnock Down Construction to save freight

S.No.	Name of The Equipment	Size /Specification
37	Surgical Bin Assorted	
38	Wheel Chair (SS)	Ultra-lightweight T6 Aluminum S-Style Ergonomic Seat Frame Padded Seat and Back Upholstery Fixed Armrest with Padded Armrest Quick Release Axles and Forks High strength, light weight Swingaway Footrests
39	Stretcher/Patience Trolley (SS)	Frame work made of Tubular MS Pipe It has Safety Side Railing It comes with adjustable I. V. Rod, Utility Tray, Cylinder Cage The top is fitted with mattress The body section is mounted on 15 cms castors , two with brakes Size: 180L x 55W x 80H cms
40	Instrument Tray (SS) Assorted (10 Big Size)	
41	Kidney Tray (SS) - Assorted	
42	Basin Assorted (SS)	
43	(2 Basin Type)	
44	(1 Basin Type)	
45	O2 Cylinder Trolley (SS)	M.S. tubular pipe construction with two castors of 10cm. Pre-treated and powder coated.
46	Nitrous Cylinder Trolley (SS)	
47	Saline Stand (SS)	Stainless Steel I.V. stand with two locations & three wing base. Pretreated Epoxy powder coated I.V. stand with two or four locations. With Castors. Variable Height Adjustable.
48	Waste Bucket (SS)	
49	Dispensing Table Wooden	
50	Bed Pan (SS)	
51	Urinal Female	
52	Name Board for Cubicals	
53	Waste Disposal - Bin/Drums	Constructed from S.S. Removable inner container of plastic material. Capacity 11 lt. Size : 28 x 36cm.
54	Waste Disposal - Trolley (SS)	
55	Linen Almira	
56	Stores Almira	
57	Arm Board Adult	
58	Arm Board Child	
59	SS Bucket With Lid	
60	Bucket Plastic	
61	Ambu bags adult with Mask Set	
62	O2 Cylinder with spanner and flowmeter ward type	
63	Diet Trolley - stainless steel	stainless steel food warmer hospital food trolleys
64	Needle cutter and melter	
65	Thermometer clinical	Digital
66	Thermometer Rectal	Rectal Thermometer Digital, Prismatic Pear shaped bulb Range - 35-42°C & 95-108°F
67	Torch Light	LED Type: 3 W White LED Product Size: 153*33*28mm Product Weight: 125g without battery and Battery weight will be 46 G And total package will be 450g Battery: 1x18650 Li-Ion Battery Bulb Details: One 3W high power led in 120 lumens, white light. Three mode: High power, Low power, flashing. 16 steps of clear Zooming. Recharge Details: One 18650 Li-Ion battery, 3.7V, 2200 mAh capacity Can be charged by AC charger or car charger (12V Optional) Charging time for AC charger: 6 hours



 A collection of handwritten signatures and initials in black ink, including names like 'Srinivas', 'Raj', 'Ravi', 'Ravi', 'Ravi', 'Ravi', and 'Ravi'.

S.No.	Name of The Equipment	Size /Specification
68	Cheatles Forceps assorted	
69	Stomach wash equipment	
70	Emergency Resuscitation Kit-Adult	
71	Laryngocope adult and child set	
72	Magill Forceps	
73	Airways 0-5 sets	
74	Refrigerator 165	LG 5 STAR WITH STABILIZER(2 YEAR WARENTY)
75	ILR	
76	Deep Freezer	Equipped with CFC free refrigerator and air cooled compressor for providing efficient cooling as well as air flow in cabinetHigh capacity air cooled condensers that feature aerodynamically shaped fansFeaturing washable concessive filter that provides for dust free usageSystem coming with thick polyurethane insulation of 50 - 80 mm for effective cooling supportSystem require minimum power consumptionSystem featuring presence of Digital electronic temperature controller cum Indicator that provides for easy readabilty possibilities System construction featuring durable stainless steel interior that provides for maintaining temperature as well as allows easy cleaningPresence of double gasket seals between lid and cabinet that provides for increased efficiency of systemSpecifications:Working Range Available Upto - 20oC • Up to - 40oC • Up to - 60oCElectrical Requirement 220 – 240V/50Hz
77	Generator 125 KV	Fuel Type: DieselCylinders: 4Phase: Three PhasePower Rating Range: 125Fuel Tank Capacity Range: 200 LitresWeight Range: 2000Speed: 1500 rpmBattery Capacity: 115 AhStyle: Standby GeneratorsLxWxH(Weight): 3500x1200x1700Rating (kVA): 125Rated kW: 100BHP: 152



 A collection of handwritten signatures and initials in black ink. From left to right, there is a signature that appears to be 'Srij', followed by 'JK', 'WAD', 'DSS', 'Dole', 'Uph...', and 'Cajmy'. Below these, there is a signature 'Anil' with a horizontal line underneath it.

OFFICE OF THE CHIEF MEDICAL AND HEALTH OFFICER. DIST-MUNGELI (C.G)

Meternal Health Equipment for 100 Bed MCH Wings

S.No.	Name of The Equipment	Size /Specification
1	Labor table with foot steps	CRCA steel tube frame SS three section top Leg section slides completely under the trunk section Trendelenburgs position by Pneumatic pump Adjustable back section on ratchet SS side railing, Hand grips on either side Padded Lithotomic crutches Mattress Dimension: 1830 L x 680 W x 760 H mm approx Pre-treated and Epoxy Powder Coated
2	Examination table with foot steps	Frame made of CRCA steel Cushioned Two section top Head section adjustable on Pneumatic pump Measuring 450 mm L x 510 mm W approx Body section admeasure 1380 L x 51 W mm approx Three drawers underneath the top section Three storage units under the draws Pull-out foot-step Foldable/adjustable B.P. Apparatus tray Dimension: 1870 L x 510 W x 810 H mm approx Pre-treated and Epoxy Powder Coated
3	Pulscoxymeter adult	Low power consumption, battery-low indicator Adjustable brightness, Automatically power off Suitable for pediatric and adult Dual color LED displays SPO2, PR, Pulse bar and waveform Low power consumption
4	Oxygen cylinder	
5	Suction machine adult - electrical	Noiseless oil immersed pump Developed with ¼ Hp electric motor Easy mobility with smooth castors Self-sealing rubber caps on jars
6	Foot operated suction machine	Energy saving compressor Noiseless operation Sturdy stainless steel cabinet Mounted on heavy duty castors Specifications: Weight: 17kg. (Approx.) Dimensions: W xD xH = 12" x 9" x 36" (with Handle) Power Supply: 230V AC, 50 Hz.
7	Adult resuscitation ambu bag with mask	Silicone Adult 1600 ml Resuscitator Set2 with 60CM H O Pop-off Valve• Silicone Mask Size: 4 No. • 2600 ml Oxygen Reservoir Bag• Disposable Oxygen Tubing 2 Mtr. • Reusable Latex Free
8	Newbrom resuscitation ambubag with mask 0, 1 for NBCC	
9	Adult Weighing machine	Accurate reading Battery operated Easy usage
10	Digital newborn weighing machine	Power supply: AC 230V + 10%, -20%, 50 Hz, +-2% Overall dimensions: 555x385x240 mm with bowl Feather touch membrane keyboard

S.No.	Name of The Equipment	Size /Specification
11	BP apparatus	LCD display in any slanting position as per convenience Mark the blood pressure value when it is diagnosed by you with the help of stethoscope Automatic Deflation Valve No need to memorise your blood pressure reading LCD bar emulates the mercury column electronically Mercury free Accuracy similar to Diamond mercurial instruments Memory for Systolic and Diastolic marking Pressure display on LCD column plus digital with background light Pulse rate readout Sturdy, durable, light weight, moulded cabinet Battery saving feature for LCD Superb control valve for perfect pressure drop Special cuff, bladder and bulb, more durable Brand-Diamond LCD Bar BP Apparatus : BPDG 031, BPDG 234 LCD Super Delux
12	Room warmer	Thermostat control for variable temperature settings Power(Watts): 1000W/2000W Voltage: 230V~50Hz Brand-Bajaj Majesty RX 10 Fan Room Heater ,Usha Hc 812 T Thermo Fan Room Heater
13	Foetal doppler	
14	Stethoscope	UltraScope Single Stethoscope Weight (oz) 5.80 Height 0.88 Length 30.00
15	Glucometer	Digital Automaticest Strips , Hospital Glucose Meter BRAND- Accu-Check
16	Wall Clock	Digital battery and electrical
17	Foreceps delivery kit	
18	Silastic vaccume extractor	Silicone Cup : 40, 50, 60, 70 mm with/without release valve Stainless steel cup : 40, 50, 60, 70mm Traction handle, stainless steel / brass chrome plated Rubber / silicone tube, autoclavable Net powder / PVC coated to hold bottle Bottle glass moulded Rubber bung with 3 holdes. Stainless steel / brass chrome plated valve Stainless steel / brass chrome plated valve with pressure release valve Pressure guage Hand pump vacuum stainless steel / brass chrome plated with plastic / ms handle
19	Emergency call bell	wifi wireless bell
20	Delivery Tray containing scissor 1, Artery forceps 2, Sponge holding forceps 2, Sims Speculum 1, Bowl for antiseptic lotion 1, Kidney my 1	Containing Scissor 1 , Artery Forceps 2, Sponge holding forceps 2, Sims Speculum 1, Bowl for antiseptic lotion 1, Kidney Tray 1

S.No.	Name of The Equipment	Size /Specification
21	Epidiomyom tray containing Episiotomy scissor1, Artery forceps 2, Allis forceps 2, Sponge holding forceps 1, Toothed Forceps 1, Thumb forceps 1, Kidney tray 1, Needle holder 1, Needle (Round body 1 and cutting 1)	Episiotomy Scissor 1 , Artery Forceps 2, Allis Forceps 2, Sponge holding forceps 1, Toothed Forceps 1, Thumb forceps 1, Kidney Tray 1 , needle holder 1, needle (round body 1 and cutting 1)
22	LSCS Set	Instrument Tray with cover – Stainless steel 300x 200 x 65 -1 Towel Clips (Backhaus) 13cm- 6 Sponge Holding Forceps (Forester; Straight; serrated) 25cm -2 Artery Forceps Straight – CRILE (Small) 14 cm- 6 Halstead Mosquito Forceps 12.5 cm -6 Tissue Forceps 18 - 20 cm- 4 Needle Holder (Mayo-Hegar) Straight 18 cm -2 Surgical Knife Handle (one each of No. 3 and 4 to be used with surgical blades sizes 20,21,22,23 and No 4 to be used with blade sizes 10,11,12 and 15-2 sets Abdominal Retractor size 3 -1 set Abdominal Retractor Double Ended (Richardson-Eastman) set of two stainless steel blades – Large - 49mm wide x 63mm deep & 38mm wide x 49mm deep, total length – 28cm Small – 20mm wide x 28mm deep & 28mm wide x 36mm deep, total length – 26 cm-1 Abdominal Retractor Double Ended (Richardson-Eastman) 1set of two stainless steel blades –
23	T.T. Set	
24	D&C Set	
25	MVA Syringe	
26	Kocker Forceps small	
27	Kocker Forceps large	
28	Sims Speculum- Midium	Brass & Stainless (1 inch 2 inch 3 inch)
29	viginal wall Retractor	Sizes 10" Material:Stainless Steel • Double Ended, Serrated • Rust free • Sturdy construction • Accurate dimensions
30	Uterine Sound	Stainless Steel Length 12-1/2" Tip Configuration Blunt Instrument Type Uterine Sound Curvature Flex Working Surface Style Smooth Handle Thumb Grip Material Silver Plated Disposable or Reusable Reusable Sterile or Non-Sterile Non-Sterile
31	PPIUCD Kit	

Handwritten signature

Handwritten initials

Handwritten initials

Handwritten signature

Handwritten initials

Handwritten signature

Handwritten signature

S.No.	Name of The Equipment	Size /Specification
32	Cervical Biopsy Set	INSTRUMENTS BOX STAINLESS STEEL 32X15X6cm / 12½x6x2¼" MUSEUX TENACULUM FORCEPS 24.0cm / 9 ½", 8mm FAURE CERVICAL BIOPSY AND SPECIMEN FORCEPS 21.0cm / 8 ½" SCHUBERT CERVICAL BIOPSY AND SPECIMEN FORCEPS 29.0cm / 11 ½" RECAIMER-SIMS-BUMM UTERINE CURETTE 31.0cm / 12 ½", MALLEABLE, FIG. 00-16 COLLIN VAGINAL SPECULA, 110 x 40mm FOERSTER SWAB FORCEPS 25.0cm / 10", STR, SERRATED SIMS UTERINE SOUND 32.0cm / 12 ½", MALLEABLE
33	Formaline Dispenser	
34	Air Purifier for LR OT SNCU	Dual UV sterilization air purifier Dual UV sterilization air purifier Purification process: 6- stage purification process, electric static / hepa filter / UV, photo catalyst / activated Carbon / ions Negative ions: Produces 8,000,000 ions/cm3 Noise levels: 45 db Voltage supply: 220 V, 50 Hz Area covered: 500 Sq. ft. approx or 250 sq. ft. Disk surface: 1.7 sq. yd. Air throughput: up to 2 cu. yd./min. Speeds: 2 Sound level: 37/42 dBA Dimensions: 9.5 x 10.5 x 11.8 in Weight: approx. 7 lb Motor output: approx. 32 watts Tank capacity: 1.2 gallons Request Callback
35	Suturing set	Forceps, Artery, Curved, 150mm Forceps, artery, Straight, 150mm Forceps, Dissecting, Straight, Plain, 130mm Forceps, dissecting, Straight, 1/2 Teeth, 130mm Forceps, Sponge Holding, 240mm Needle Holder, mayo, 150mm Scissors, mayo, Straight, 150mm Scissors, ligature, Spencer, 115mm Instrument Container, s/s with cover
36	LP Tray set	
37	Endo Tracheal tubes sets	Advanced Micro-Thin Polyurethane Cuff Material Designed to Reduce Micro-Aspiration Endotracheal tube - cuffed: Size: 4, 4. 5, 5, 5, 5, 6, 6, 5, 7, 7. 5, 8, 8, 5, 9, 9, 5, 10(mm) Endotracheal tube - plain: Size: 2, 2. 5, 3, 3, 5, 4, 4, 5, 5, 5. 5(mm)
38	tongue depressors	6 inch long, wood

devid
Surya

Ke

@02

Phob

FE

Bubs

Ughu

Am!

Capm

OFFICE OF THE CHIEF MEDICAL AND HEALTH OFFICER, DIST-MUNGELI (C.G)

Child Health equipment for 100 Bed MCH Wings

S.No.	Item	Size /Specification
1	Resusclator, hand operated, neonate and child, 500 ml	
2	Laryngoscope Set- Pediatric Size	Complete with Standard Size Battery Handle made of Stainless Steel + Three Miller Stainless Steel Blades all Satln/Dull Finish and packed In Zip Case .
3	Electronic baby weighing Scale	Standard Capacities 20 kgPlatter Size 295 x 500 mm absPower Supply Main / BatteryDisplay Digt 6 DigitNumber of Keys 3 keysBattery Charger yesBattery Remote Control NoNumber of characters on Display 6 DigitColor Red/GreenStorage Capacity YesOuter Body absMessage Languages NumericDisplay 6 Digit (front)Function Power
4	Suction Pump Foot Operated	
5	Thermometer, Clinical, digital	Clinical ThermometerOval flat typeLens front, dual scaleCylindrical bulbRange: 35-45°C & 95-108°FAccuracy: ± 0.1C & ± 0.2°FIn plastic case
6	Light for examination	Technical Data of led Cold-Light Source :Lamp: ledColor Temperature: 6000 KDevice type : I/BLamp Power :Equivalent to 300Watt xenonInput Power : 400 WCase Temperature : <55°CWorking Noise : <55DBOperating Life : 50,000.00 hoursOutside electrical source: 220V±10%,50HzWorking Environmental Humidity : 5-32°CRelative Humidity : <70%Dims. : standardNet.Weight. : standard
7	Syring Hub Cutter	
8	Phototherapy unit single head high intensity	Irradiance: Minimum 40 µW cm ⁻² nm ¹ (+10± %) at 30 cm from the With adjustable Intensity (High, Medium & Low)Optical Sensor / RadiometerMeasurement band 0 µW cm ⁻² nm to 200 µW cm ⁻² nmResolusion- 0.1 µW cm ⁻² nmReading accuracy - ±2 µW cm ⁻² nmNoise - <52 dBAWavelength>450-460 nm (peak 451 nm). free of UV and IR radiationElectrical Specification-Output Voltage :- 12 VDCOutput power:- 50 WInput voltage:- 120 -240 V, 1.5 AOperating frequency:- 50/60 HzEnvironments Requirement:-temperature rangeOperating 18 to 28 °C (64.4 to 82.4 °F)Storage -20 to 60 °C (-4 to 140 °F)Relative humidityOperating -10 % to 95 % (non condensing)Storage -10 % to 95 % (non condensing)atmospheric PressureOperating -700 hPa to 1060 hPaStorage -500 hPa to 1060 hPaData transmissionRS-232 serial port -Standard UART protocolBits per second -9600 bpsData bits -8Parity -NoneStop bits- 1Flow control- None Lamp type: Light emitting diode (LED) for 30,000 hours providing the same Intensity level.Height : Adjustable from 1270 ± 20 mm to 1730 ± 20mm up to 90°on either side.Time totalizer: Digital (compact) 1. Time totalizer for the LED running time (non-resettable) 2. Therapy timer for the treatment time (resettable)Examination lamp: The LED PT is provided with 2 useful
9	Resusclator , hand-operated, neonate and child, 200 ml	Resuscitator chilled 1 pcsSuction Foot Type Small 1 pcsL-Scope 4 Blade S.S. 1SetL-Scope 2 Blade S.S. 1SetOxygen Hood Round Jointless 1SetE.T.Tube for Ped 3 PcsAirways plastic (Set of 3 pcs) 1SetStylette (Set of 3 pcs) 1 SetFace mask Round shape 1 SetFace mask rubber 1 SetMucus Extractor 2 PcsM-Forceps (Set of 3 pcs) 1 SetM-Brush(Set of 3 pcs) 1 SetMouth Bite (Set of 3 pcs) 1 set
10	Suction pump , portable	
11	Surgical Instrument suture/Set	

(Handwritten signatures and initials)

S.No.	Item	Size /Specification
12	Oxygen Hood , S and M Size, Set of 3 each including connecting tubes	
13	Oxygen Concentrator	1.To deliver 8 Litres /minDual Port (each can deliver 4 litres / min)Advantage: can be connected to 2 patients at a time3. 24 hour usable4. Flow rate – 1-10lpm5. Outlet pressure – 18-20 psigAlarms – 1. Power failure, 2. High & Low pressure, 3. Low purity test, 4. temperature Advantage: can be connected to 2patients at a time6. Advantage: can be connected to 2 patients at a time
14	Pulse Oxymeter, bedside, neonatal	1. Method: Dual wavelength LED2. Oxygen saturation Range 0-99% Resolution 1% Accuracy + 2 at 70-99% range, + 3 at 40-70% range Averaging time selectable (3-21 secs) Search time selectable (10-40 sec) Sensors Re-usable finger probe, Re-usable flexible multi-site probe3. Pulse rate Waveform Plethysmographic or bar form Range 20-250 bpm Resolution 1 bpm Accuracy + 2 bpm4. Display SaturationPulse RateWaveformAlarms4. Alarms High SpO2 Range 70-99% Low SpO2 Range 50-99% High pulse 20-250 bpm Low pulse 20-200 bpm System alarmsProbe failurePoor signalPower failure5. Trends Memory 12 hours Data interval 20 sec Display 2-12 hours6. Power 220/240 V AC, 50/60 HzRechargeable internal batteryBattery back-up at least 2 hours
15	Neonatal Stethoscope I For each bed	Machined Stainless Steel· Chestpiece Technology - Double sided· Chestpiece Weight - 40 Gram· Diaphragm Diameter - 1.31 In / 3.3 cm· Diaphragm Material - Epoxy/Fiberglass· Diaphragm Type - Floating Diaphragm· Earltip Type - Soft Sealing· Extra Eartips - Yes· Headset Material - Wide Diameter Aerospace Alloy / Anodized Aluminum· Length - 28 in / 71 cm· Model - Pediatric· Net Weight (approx.) - 105 Gram
16	Sphygmanometer, neonate electronic	Wall mounted B.P. Apparatus-Accuracy: +/-3mmHg· Sub-division: 2mmHg· Dial-type, mercury-free manometer· Measure scope: 0-300mmHg
17	Light examination for mobile	
18	Measuring tape vinyl coated	
19	Kidney basin stainless steel, 825 ml	
20	Dressing tray, stainless steel	
21	Infusion stand double hook	
22	Indicator, TST Contro; spot	
23	Irradlance meter for phototherapy units	
24	Infantometer	Readability: to nearest mm. For measurement of length, for growth assessment in infantsTechnical DataMeasuring range in cm:33 - 100 cmMeasuring range in inch:13 -39 "Graduation [Measuring Rod]:1 mm / 1/16 inchMeasure (W x H x D):1103 x 169 x 402 mm , 43,4 x 6,7 x 15,8 inchapproxNet weight:3,8 kg , 8,3 lbsFunctions: lying measurement
25	Bench top steam Autoclave, electrical	
26	Sterilising drum 165 mm diameter	
27	Electric Steriliser	
28	Gowns for staff and mothers	staff Gown -Dark blue colour, mother gown -purple colour
29	Washable slippers	small/medium/large
30	Hacmatocrit centrifuge	
31	Binocular microscope with illuminator	
32	Bilirubinometer	Battery Number of measurements (when fully charged) Internal NIMH 250AC adapterInput 100 V ~ to 240 V ~, 50/60 Hz, 11 VA to 18 VAOutput 9 VDC, 500 mALight source Pulse xenon arc lampLight source life 150,000 measurementsSensors Silicon photodiodes PHYSICAL SPECIFICATIONWidth 56 mmDepth 45 mmHeight 168 mmWeight 203 g ± 10 %PERFORMANCE SPECIFICATIONSMeasurement range 0.0 mg/dL to 20.0 mg/dL (0 µmol/L to 340 µmol/L)Clinical Data Standard Error of Estimate (SEE) ± 1.5 mg/dL or ± 25.5 µmol/L (> 35 weeks gestation)± 1.6 mg/dL or ± 27.4 µmol/L(24 – 34 weeks gestation)DATA TRANSMISSION USB port HL-7 or CSVAMBIENT CONDITIONSDURING OPERATIONTemperature 10 °C to 40 °C (50 °F to 104 °F)Air pressure 700 hPa to 1060 hPaAltitude range -400 m to 3.000 mRelative humidity 30 % to 95 % (without condensation)DURING STORAGE AND TRANSPORTTemperature -10 °C to 50 °C (14 °F to 122 °F)Air pressure 700 hPa to 1060 hPaAltitude range -400 m to 3.000 mRelative humidity 30 % to 95 % (without condensation)
33	Glucometer with Dextrostix	
34	Refrigerator 110L	
35	Voltage Servo Stabiliser	5 star with Stabilizer two chamber door
36	Room Heater	
37	spot lamps	
38	Wall Clock With Second Hand	

OFFICE OF THE CHIEF MEDICAL AND HEALTH OFFICER, DIST-MUNGELI (C.G)

Lab Equipment for 100 Bed MCH Wings

S.No.	Item	Size /Specification
1	Binocular Microscope	Viewing Head: Monocular/Binocular/Trinocular Head 45°, 360° rotatable Eyepiece: Anti Fungal Eyepiece WF10X Objective: Anti Fungal Achromatic Objective 4X, 10X, 40X Nosepiece: Quadruple Turret Analyzer: Rotatable Analyzer with Graduation 0°-90° Bertrand Lens: Bertrand Lens, sliding in/out of optical path Optical Compensator: Slip (first class red), ¼ slip, Quartz Wedge Revolving Round Stage: Diameter 135mm, 360° Rotatable & Graduated in 1° increments Minimum Resolution 6' when using vernier scale center adjustable Focusing: Coaxial Coarse and fine Knobs Polarizer: Sliding in/out of optical path located on the top of collector Illumination: 6v20w Halogen Lamp
2	Electric Calorimeter	Heating Coil: 5W Standard Binding Posts Coated Supporting Posts and Coil Single-Hole Rubber Stopper Calorimeter Connects to Power Supply, Ammeter, and Voltmeter
3	Electric centrifuge, table top	Max Speed : 14,000 rpm Max RCF : 20,290 (x g). Max Capacity : 6 x 50 ml (300 ml) CT14RD is our latest family member of CT series, having the following advanced features: Maintenance free brushless drive, power break Auto-lock rotor setting system Automatic rotor identification Powerful refrigeration system Large LCD display with informative graphics Wide selection of rotors
4	Hot Plates	Overall size(WxDxH) mm 200x310x115 Plate size(WxD) mm 180x180 (ceramic coated) Temperature (surface) 380???(Max.) Strring speed rpm 100 ~ 1,500 capacity m100 ~ 3,000 Heater (sheath) W680 Material top plate Ceramic coated top plate body Steel plate with powder coated finish Power source & consumption AC 230V 50/60Hz 1phase Size of Heating Pan: 10" x 12" Inches 10" x 16" Inches 12" x 18" Inches 18" x 24" Inches Temperature Range: up to 350 deg.C Energy Regulator: Yes Power Indicator: Yes Rating: 1500 to 4000W Power: 220 V AC 50/60Hz
5	PH meter	pH Range: 0.00 to 14.00 Resolution: 0.01 pH Accuracy: ±0.01 pH Temp. Range: 0~100°C Resolution: 0.1°C Accuracy: ± 0.3°C pH Calibration Points: Up to 3 points with Auto-buffer Recognition mV Offset: ±150 mV Temp. Offset: ±5.0 °C pH Buffer Sets: USA (pH 4.01, 7.00, 10.01); NIST (pH 4.01, 6.86, 9.18) Temp. Compensation: Automatic/manual (0 to 100°C) Slope: % 80 to 120 pH Slope & Offset Display: Yes Hold Function: Yes Averaging / Stability (READY): Yes Memory: 50 Data Sets Inputs: BNC, ref. (half-cell), Ground, 2.5mm phono jack (ATC), power jack Output Recorder: (±2000 mV)
6	Pnediatric Glucometer/Bilirubinometer	Automatic Glucometer Easy operation Compact designed Clear display
7	Gluemeter	Automatic Glucometer Easy operation Compact designed Clear display
8	Haemoglobinometer	Display -Digital 3½ Digit, Bright LED Display Mode % T, O.D. and 3 concentration Modes, C1, C2, C3 Zero Adjustment Automatic (Without Knob rotation) Accuracy + 0.02 O.D. Stability + 0.02 O.D. Per Hour Light Source 6.8 Volt, 0.3 Amp Tungsten Lamp Amplifier Micro controller Based Memory In built memory to retain last "K" factor for concentration even after power loss. Sample Volume 1 ml. minimum Power 230 V + 10 % AC, 50 Hz. Accessories Set of Test Tube - 5 No. Dust Cover - 1 No. Brand - Hellasi, TT3
9	TCDC Count apparatus	total number of counts 999. Counts in each group 0-99. No. Of operating keys. Twelve (12). BASO (Basophilic) Variate Lymphocyte EOS (Eosinophilic) MON (Monocyte) Neutrophilic stab granulocyte LYM (Lymphocyte) Prom (Promphocyte) Neutrophilic segmented Neutrophilic orthochromatic Normoblast Delete (-) or Minus (%) Percentage Reset Delete facility Available. Count category 9. Input voltage Mains -220 ±10%, 50Hz, Battery -12V DC Power Consumption 10W. (Approx)
10	ESR stand with tubes	Special Pipe: stainless steel pipe Section Shape: Round (Westergen Method)
11	Test tube stand	Small, Normal, Large
12	Test tube rack	Small, Normal, Large
13	Test tube holder	Normal
14	Spirit lamp	Normal (Bunsen Burner) / Gas Nope
15	Timer stop watch	Four countdown channels plus stopwatch channel and time-of-day clock. Timer/Stopwatch; Fisherbrand; Countdown; Traceable; Four-channel; Accuracy: 0.01%; Range: 100 hours; Display: 6-digit 0.75 in. H LCD display; Power supply: 2 year silver oxide; 2 oz. (57g); Count down, count, time out and time of day, extra-loud high decibel alarm Timer: Counts down from 99 hours, 59 minutes, 59 seconds to 1 second. Stopwatch: Counts up from 1 second to 99 hours, 59 minutes, 59 seconds. Timing capacity: 100 hours Accuracy: 0.01% "Thru-zero" function counts down, alarms, counts up Time-out mode Easel stand, lapel clip, hole for lanyard and magnetic back Alarm can be silenced automatically or manually Memory recall Time-of-day clock feature Dimensions: 6.35L x 6.03W x 1.27cmH (2.50 x 2.375 x 0.5 in.)
16	Alarm Clock	Digital Lcd display battery and electrical

[Handwritten signatures and initials are present at the bottom of the page, including names like 'Sury', 'Raj', and 'Anil']

S.No.	Item	Size /Specification
17	Ordinary Refrigerator	Capacity (Litres): 245 L Color: GREY Star Rating: 4 Star Brand-LG
18	Knif Sharpner	
19	Whole Blood Finger Prick HIV Rapid Test and STI Screening Test each	

Handwritten signature

Suraj

Handwritten signatures and initials:
Te *AD* *De* *Alh*
Agb *R* *Am* *Am*

OFFICE OF THE CHIEF MEDICAL AND HEALTH OFFICER, DIST-MUNGELI (C.O.)

List of Refrigeration and AC Equipment for 100 Bed MCH Wings

S.No.	Name Of the Equipment	Size /Specification
1	Spare ice pack box	Insulated Ice box 50 liter Branded
2	Room Heater/Cooler for Immunization clinic with electrical Fittings	
3	Waste disposal twin bucket, hypochlorite solution	
4	Thermometers Alcohol (Stem)	Contactless temperature measurement• Best usable for cold Chain equipment (WIC, WIF, ILR, DF, Cold Box, Vaccine Carrier)• Easy to hang (Horizontal)• Automatic shut off after a minute• Visible in red color• Safe for daily use• Manua
5	Almirah for Vaccine logistics	Size: 960 × 400 × 1750 mm. Epoxy coated mild steel framework. Stainless steel bottom.
6	Almirah for Vaccine logistics	Size: 960 × 400 × 1750 mm. Epoxy coated mild steel framework. Stainless steel bottom.
7	Immunization table	
8	Chair for new staff proposed	Colour: BlackSeat Size: 21" W X 19" DBack Size: 19" W X 23" HOverall Dimensions: 24" W X 19" D X 34" - 36" HMaterial: Fabric Pneumatic Seat Height Adjustment. Medium Height Back Rest. Lumbar Adjustment on Back Small Cushion Pillow Support on Back Nylon Netted Mesh Back Adjustable Up-Down Arm Rest. Virgin Quality PP Stand/Base Gas lift Height Adjustment. 90 Degree Tilt Lock. Symcro Push Back Design Machanism. Imported Castor Wheels with Good Grip. 360 Degree Revolving.
9	Stools for Immunization room	Adjustable Size: 320*460*620Material: MetalMetal Type: IronFolded: Yes
10	Bench for Waiting area	3 seater, SteelSize: 1900x630x900mm colour-blue Resistance against water Flat edgesHighly very spacious (Airport three seater chair)
11	Dustbin with lid	animated Design , Made of High Density Polyethylene (HDPE) material injection moulded biomedical wast standard High resistance to Heat and radiation UV stabilized Environment friendly and easy to clean Available in various coloursSpecifications:Nom. volume (L) 80Dead weight approx. (kg) 9Useful load (kg) 45A - Overall height (mm) 780B - Overall width (mm) 480C - Overall depth (mm) 560D - Upper edge comb (mm) 735E - Wheel diameter (mm) 200 colour-green
12	Water container	Material: Stainless Steel,Polypropylene And Polyurethane Insulation Water Storage Size: 10 Ltr Special Feature: Insulated With Top Quality Polyurethane ,Preserve The Hot Water Warm For Hours And Water Cold For Hours Warranty: 6 Months
13	Hub cutters	Capacity 3 Liter Body made of Stainless Steel / ABS Upper Lid made of Virgin Plastic Syringe Hub & Needle gets cut off by a sharp blade by pulling the handle. Separate holes for inserting Needles & Syringe hub. no electricity required Economical & Reusable
14	5 KVA Genrator with POL, For immunization purpose	
15	Coolers	Cools up to 2500*sq.ft.30 inch Aluminium Fan90 ltr.Tank (Seperated Tank)Aluminium & Stainless Steel ComponentryConstructed by Injection Moulding MachinePortable,Ductable,Wall Mounted, Industrial,Evaporative Air Cooler Cooling Media - Honey Comb Pad with Cellulose Material RPM/Wattage/Hp - 950 RPM/490* W/0.67* Hp Power Consumption - 1 Unit in 2 Hours Gross Weight- 49kgs Air Flow(M3/H)/CFM - 18000* CMH/10500* CFM Cooling Pad Size - 1100*100*1150mm Dimension - 1) 1135*700*1790mm/LOUVER2) 1135*600*1790mm/GRILL
16	Air Conditioners	5 star with Stablizer
17	Central A/C for ot	